

- RTD INPUT BS EN 60751
- 2, 3, OR 4 WIRE INPUT
- HIGH PERFORMANCE
- FULLY LINEARIZED
- SMALL SIZE
- 4-20 mA OUTPUT



RTD TRANSMITTERS, 2, 3 AND 4 WIRE SEM1500/P Series

INTRODUCTION


The **SEM1500/P** is a series of DIN rail mounted transmitters designed to accept RTD temperature sensors and to convert them to the industry standard 4-20 mA transmission signal. Units are supplied factory set to any one of six standard ranges or can be easily user calibrated to provide virtually any range from -292 to 1112°F, minimum range is 50°F. Non standard ranges can be supplied, factory set, at a nominal extra cost.

High accuracy is achieved by using active two, three or four wire bridge arrangements which effectively remove any errors associated with the sensor connecting cables.

The small size of the unit enables many more units to be installed in a smaller space than was previously possible.

APPROVALS

EMC Emissions BS EN 50081
Susceptibility BS EN 50082

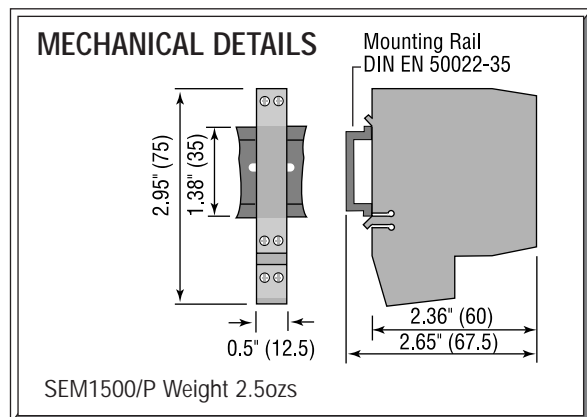

SPECIFICATIONS @ 68°F

INPUT	Pt-100 Platinum Resistor* BS EN 60751 (IEC751) BS 1904 (DIN43760) others available on request*
SEM1503/P	2 or 3 wire
SEM1504/P	2 or 4 wire
Accuracy	±0.27°F ± % reading as follows
Accuracy % rdg	0.4 0.2 0.1 0.2 0.4
Temperature °F	-292 -148 32 392 932 1112
Burn Out	UP scale standard
Excitation Current	SEM1503/P 2mA nominal SEM1504/P 1mA nominal
OUTPUT	
Type	Passive 2 wire current output
Range	4-20 mA (30 mA MAX.)
Protection	Reverse connection plus over voltage
GENERAL	
Supply	10-30 V DC
Load	700 ohms @24V
Thermal Stability	50ppm / °F
Ripple Refection	<40µA/V (measured at 1V ripple 60Hz)
Response time	100 mSecs to reach 70% of final value
Temperature	Ambient 32 to 158°F
Relative Humidity	Ambient 10-95% Non-condensing
ENCLOSURE	
Case Material	Polyamide (Grey)
Case Flammability	To UL94-VO VDE 0304 Part 3 Level IIIA
Mounting	Top Hat rail to DIN EN 50022-35
Protection	IP20
Connections	Captive screw connections
Cable Size	12 AWG solid/14 AWG stranded

SEM1500/P 6-02/PDF



STATUS INSTRUMENTS INC.

PO Box 548, 456 Park Ave., Scotch Plains, NJ 07076
Phone:(800) 700-3272 Fax: (800) 700-5468 (US & CA only)
Phone: (908) 490-0232

Email: rc@statinst.com Internet Address: www.statinst.com



BS EN ISO 9001:1994
Certificate No. Q06257

STANDARD RANGES

The SEM1500/P Series may be purchased pre-ranged to any of the following standard ranges.

NON STANDARD RANGES

Units can be supplied set up to other non-standard ranges for a small extra charge or alternatively the unit can easily be re-ranged as follows;

RANGE °F	
from	to
-22	+95
-12	+167
32	122
32	212
32	392
32	752

RANGE °C	
from	to
-30	+35
-25	+75
0	50
0	100
0	200
0	400

ADJUSTMENTS (Range selection)

Range selection GAIN and OFFSET Coarse settings are made by two 16 position rotary screw adjustment switches on the side of the unit.


Fine adjustment is by front access potentiometers. Full re-calibration details are supplied with each transmitter.

INPUT type	OFFSET RANGE °F	GAIN RANGE °F	OFFSET RANGE °C	GAIN RANGE °C
100ohm platinum	4mA	4-20mA	4mA	4-20mA
Pt-100	-148 to +428°F	75 to 1112°F full accuracy	-100 to +220°C	25 to 600°C full accuracy

CONNECTION DIAGRAM


SEM1503/P

TEMPERATURE TRANSMITTER
IN: 2 or 3 WIRE RTD (Pt100)
OUT: 4-20mA PASSIVE



SEM1504/P

TEMPERATURE TRANSMITTER
IN: 2 or 4 WIRE RTD (Pt100)
OUT: 4-20mA PASSIVE



ORDER CODE

/
 /
 /

/
 /
 /

Example: SEM1503 / P / 32 / 212 / F For Pt-100 Temperature sensor range 32 to 212°F 3 wire sensor

LOCAL REPRESENTATION



STATUS INSTRUMENTS INC.

PO Box 548, 456 Park Ave., Scotch Plains, NJ 07076
 Phone:(800) 700-3272 Fax: (800) 700-5468 (US & CA only)
 Phone: (908) 490-0232
 Email: rc@statinst.com Internet Address: www.statinst.com



Every effort has been taken to ensure the accuracy of this specification, however we do not accept responsibility for damage, injury, loss or expense resulting from errors and omissions, and we reserve the right of amendment without notice.