




# INDUSTRIAL TEMPERATURE TRANSMITTER ASSEMBLY

## 200 Series

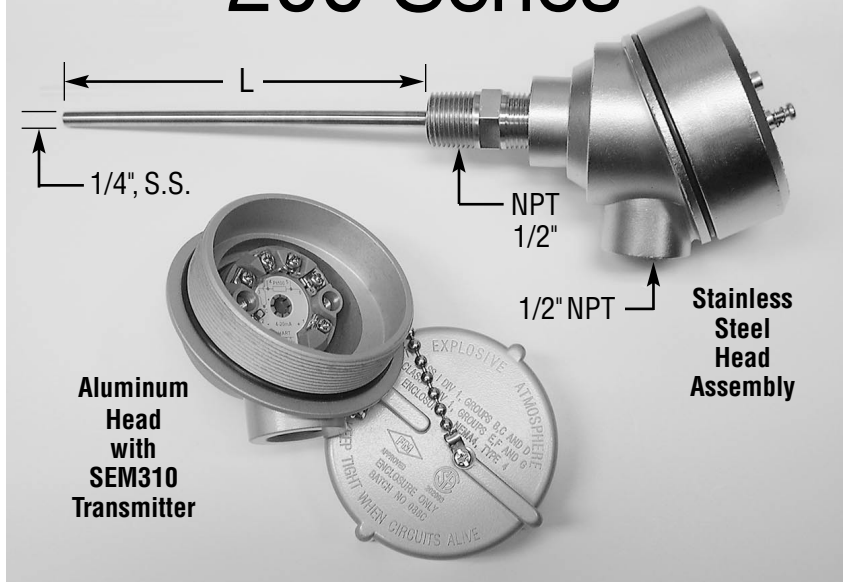

- THERMOCOUPLE or RTD
- INDUSTRIAL DESIGN
- AGENCY LISTED HEADS in ALUMINUM and STAINLESS STEEL
- COMPLETE with TRANSMITTER

<b>200</b>																																									
"L" Length in inches																																									
F Fixed SL Spring Loaded																																									
<b>Process Fitting</b> 1/2" NPT Standard 1/4" NPT Fixed Only 1/8" NPT Fixed Only																																									
<b>Connection Head</b> AN Aluminum NEMA 4 AX Aluminum X Proof SSX S. S. X Proof																																									
<b>Temperature Sensor</b>				<b>Transmitter Model #</b>																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Thermocouple Type</th> <th colspan="2">RTD, Class A, PT100Ω</th> </tr> <tr> <th>Grounded</th> <th>Ungrounded</th> <th>Max Temp.</th> <th>Model</th> </tr> </thead> <tbody> <tr> <td>J</td> <td>JU</td> <td>450°F</td> <td>EPT100</td> </tr> <tr> <td>K</td> <td>KU</td> <td>1100°F</td> <td>GPT100</td> </tr> <tr> <td>T</td> <td>TU</td> <td></td> <td></td> </tr> <tr> <td>E</td> <td>EU</td> <td></td> <td></td> </tr> <tr> <td>R</td> <td>RU</td> <td></td> <td></td> </tr> <tr> <td>S</td> <td>SU</td> <td></td> <td></td> </tr> <tr> <td>B</td> <td>BU</td> <td></td> <td></td> </tr> </tbody> </table>		Thermocouple Type						RTD, Class A, PT100Ω		Grounded	Ungrounded	Max Temp.	Model	J	JU	450°F	EPT100	K	KU	1100°F	GPT100	T	TU			E	EU			R	RU			S	SU			B	BU		
Thermocouple Type		RTD, Class A, PT100Ω																																							
Grounded	Ungrounded	Max Temp.	Model																																						
J	JU	450°F	EPT100																																						
K	KU	1100°F	GPT100																																						
T	TU																																								
E	EU																																								
R	RU																																								
S	SU																																								
B	BU																																								
For use with a thermowell, the temperature sensor "L" length is specified as the thermowell "A" length (bore depth) – 3/4". A typical model number for use in a thermowell with an "A" of 6" and a "U" of 4-1/2" would be: <b>200 - 5 1/4 - SL - 1/2 - AX - EPT100 - SEM310 - 0/400F</b>																																									

For modifications and special orders consult factory

**STATUS INSTRUMENTS INC.** [www.statinst.com](http://www.statinst.com)

PO Box 548, 456 Park Ave., Scotch Plains, NJ 07076 Ph: (908) 490-0232  
 Ph: (800) 700-3272 Fax: (800) 700-5468 Email: rc@statinst.com